



Augenti[®]
LIGHTING

ORION



LIGHT UP
YOUR
VIBES
WITH
STYLE

ORION **D**

ORION D

Se il design “è un modo ingenuo per sentirsi un po' più vicini al mistero della bellezza”, questa definizione racchiude tutto il concept della nostra collezione **ORION D**. Possiamo così, anche noi, lasciarci avvolgere dalla forza della bellezza, avendo conferma che, nel nostro lavoro, **fare cose belle e farle bene è un principio fondamentale**, prima ancora di essere una scelta imprenditoriale o una strategia di mercato.

Le **linee architettoniche** della collezione **ORION D** di fatto ne caratterizzano la sua essenza, il fascio luminoso studiato per racchiudere emozione è composto da un'**alternanza di luce e ombra**.

Il paletto **ORION D** è in grado di rispondere, con garbo, alla funzione d'uso, sia in spazi aperti, aree pedonali, piste ciclabili e aree residenziali, raccontando con stile nuove emozioni di luce.

If design “is a naive way to feel a little closer to the mystery of beauty”, this definition includes the whole concept of our **ORION D** collection. In this way, we too can let ourselves be enveloped by the power of beauty too, having confirm that, in our job, **doing beautiful things and doing them well**, basic principle even before being an entrepreneurial choice or a market strategy.

The **architectural and rigorous lines** of the **ORION D** collection actually characterize its essence, the light beam designed to enclose emotion is composed of an **alternation of light and shadow**.

The **ORION D** bollard is able to gracefully respond to the function of use, both in open spaces, pedestrian areas, cycle paths and residential areas, telling with style new emotions of light.

Si le design “est une manière naïve de se sentir un peu plus proche du mystère de la beauté”, cette définition englobe tout le concept de notre collection **ORION D**. De cette façon, nous pouvons nous aussi nous laisser envelopper par le pouvoir de la beauté. Ayant confirmé que dans notre travail, **faire de belles choses et bien les faire est un principe fondamental** avant d'être un choix entrepreneurial ou une stratégie de marché.

Les lignes de la collection **ORION D** libèrent une émotion particulière créée par **le jeu d'ombre et de lumière** qui alternent et qui créent ainsi une perception toute particulière de la lumière. La borne **ORION D** est ainsi capable d'habiller tous les espaces résidentiels, zones piétonnes ou pistes cyclables avec une lumière à la fois sécurisante et rassurante.



geometrical light
architectural design

LIGHT and SHADOW


ORION **D**

geometrical light
architectural design
easy installation





Linee architettoniche
Architectural design
Conception architecturale

Emissione luminosa DIFFUSORE
DIFFUSER light emission
DIFFUSEUR émission lumineuse

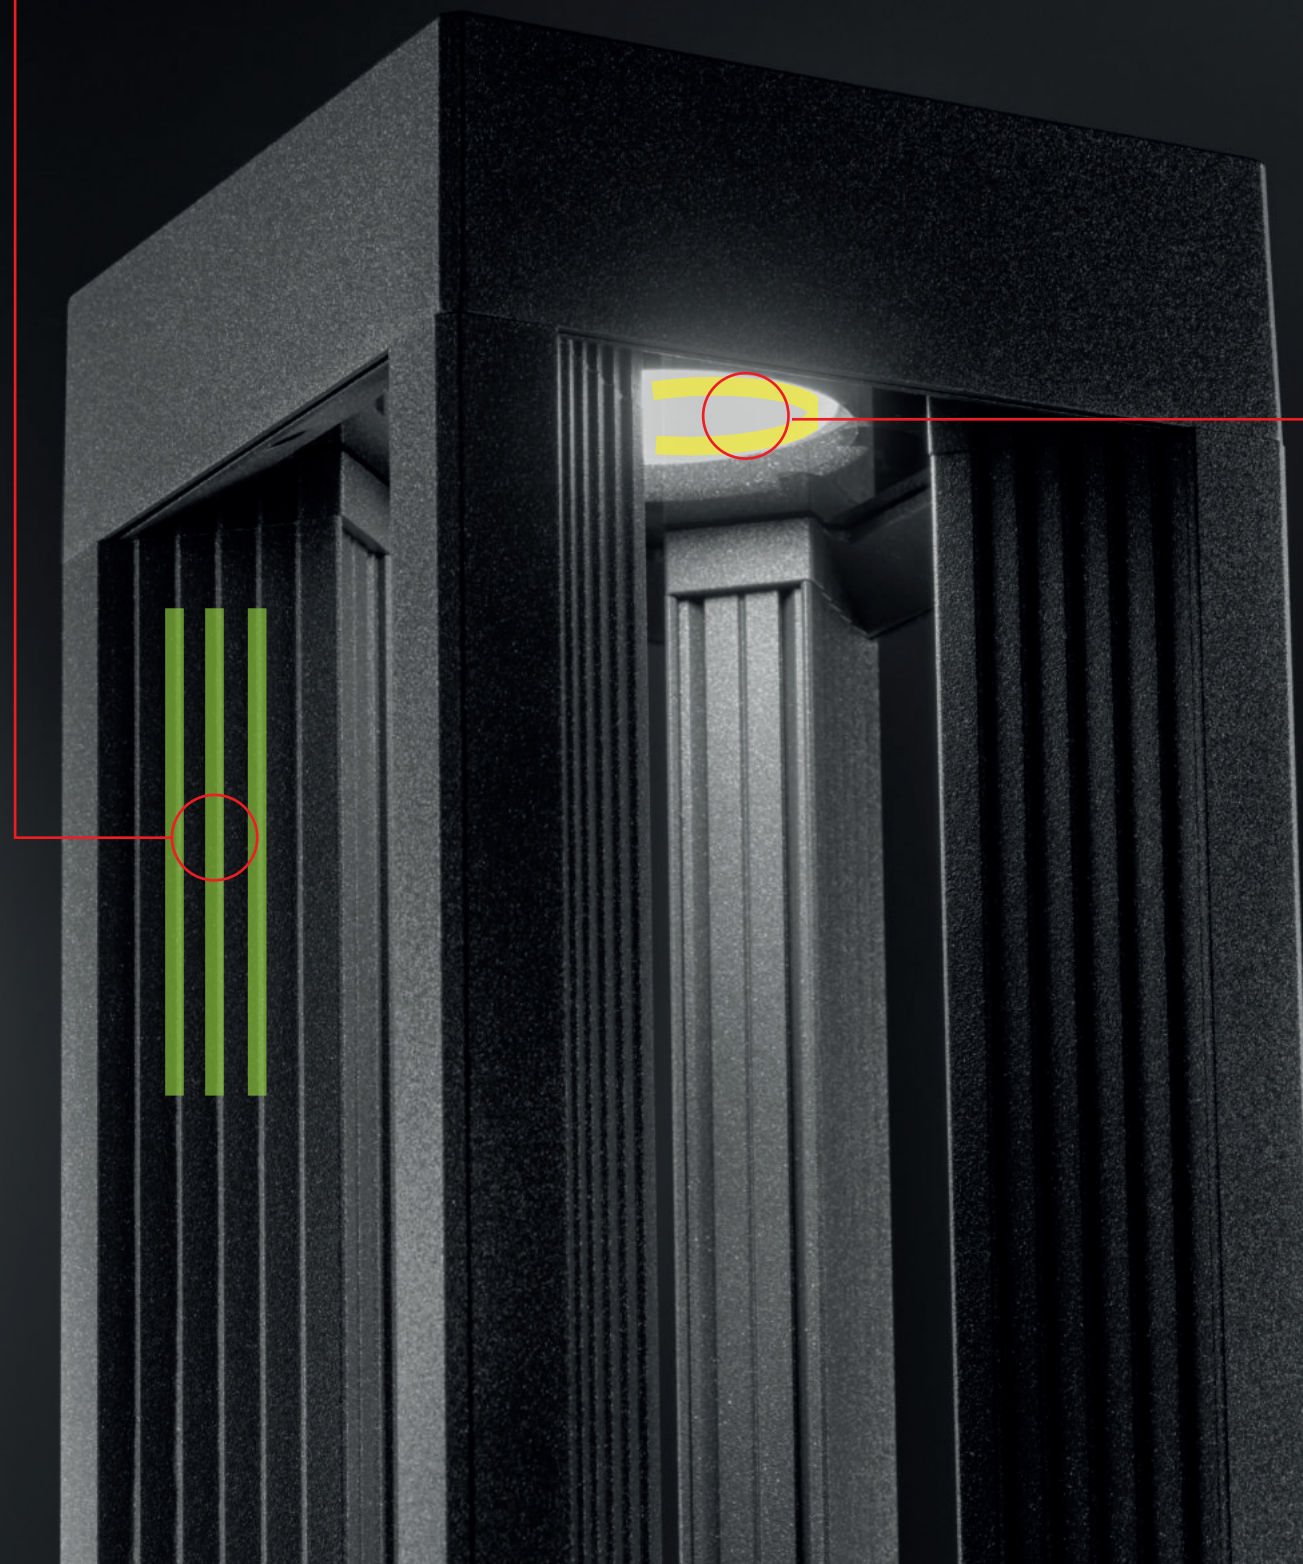

ORION D

Small Poles & Urban Lighting

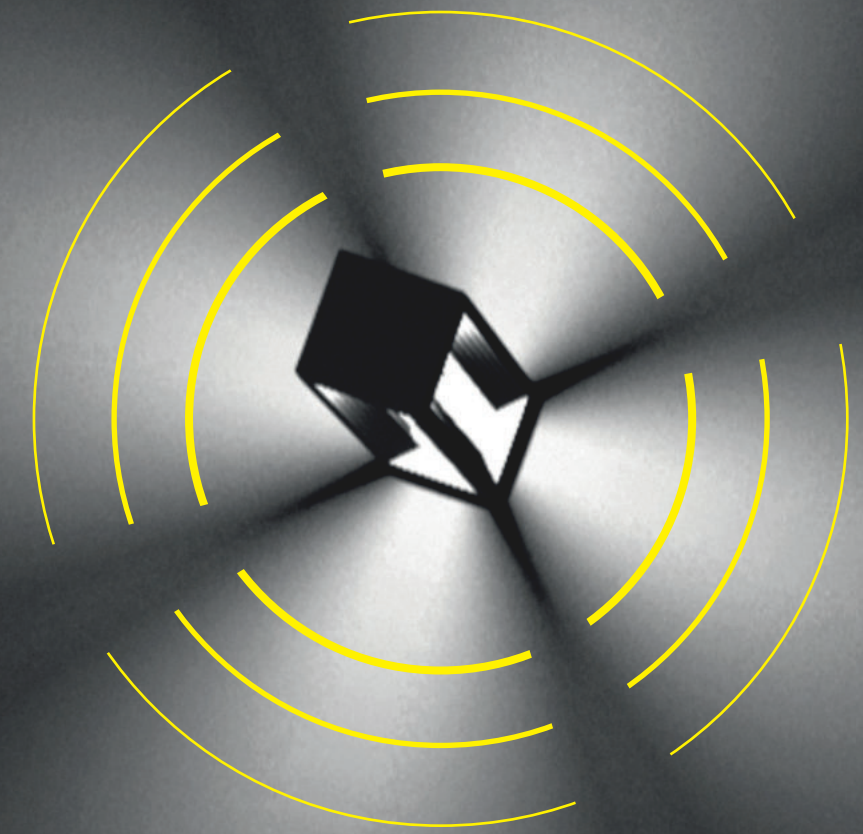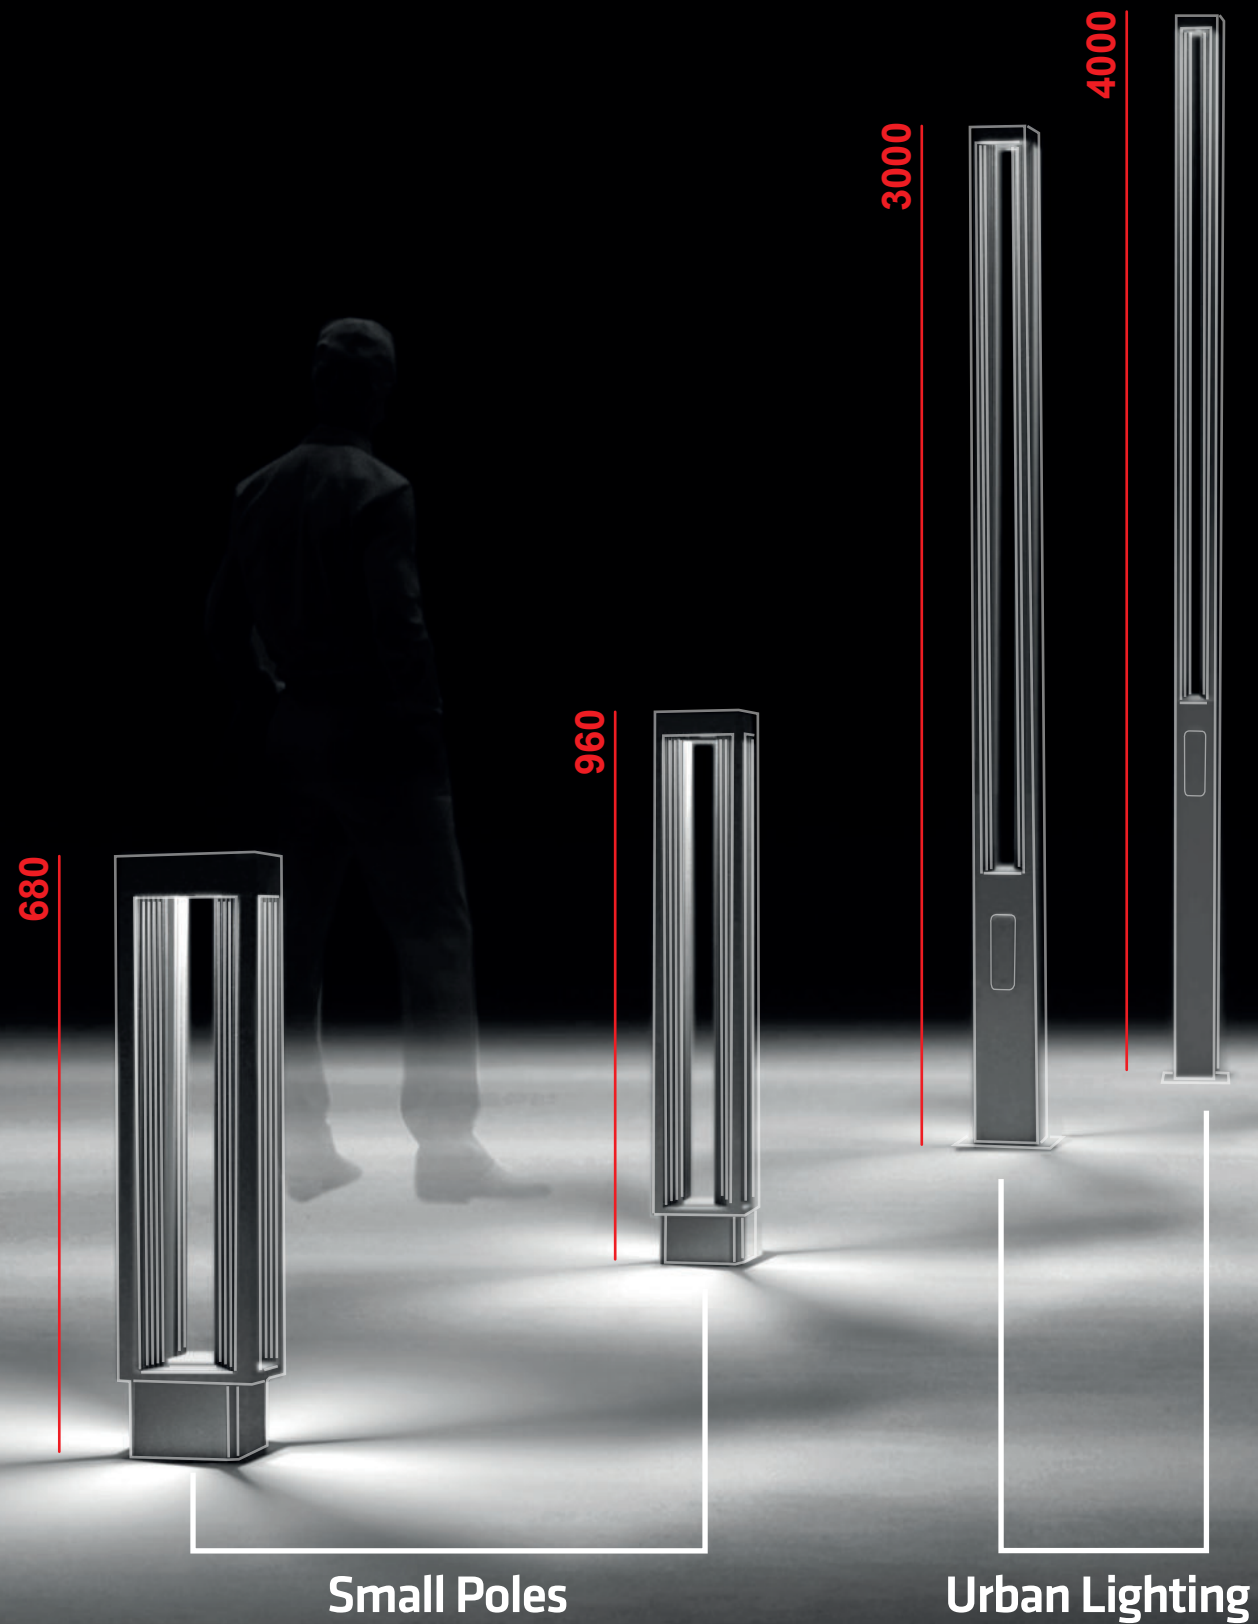

ORION D
complete collections

560F1 - H. 680



560F2 - H. 960




Augenti[®]

collection



ORION





ORION D H680



ORION D H960

Fixture Specifications

Protection . IP 65 - IK 08

Body Pole . Extruded aluminium alloy
Body/Base . Die-cast aluminium alloy

Screen . Frosted glass


Seals . Closed-cell EPDM rubber

Screws . Stainless steel A2

Paint / Finishing . Anti-corrosive UV stabilised polyester powder



Finishes



00
PURE WHITE
RAL 9016



01
BLACK
RAL 9005




10
WHITE
RAL 9010




24
BRONZE



25
RUST



30
ANTHRACITE



35
SLATE GREY



40
GREY
RAL 9006

Assembly

Ground connection system with anchoring brackets to be ordered separately. The orientation is independent of the layout of the ground fixing holes.

Application



Residential areas






Cycle
Pedestrian paths



Access areas



Parks
Gardens

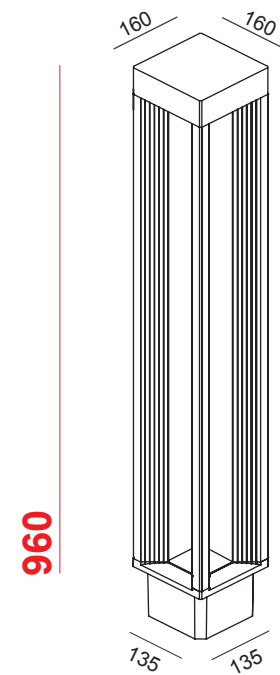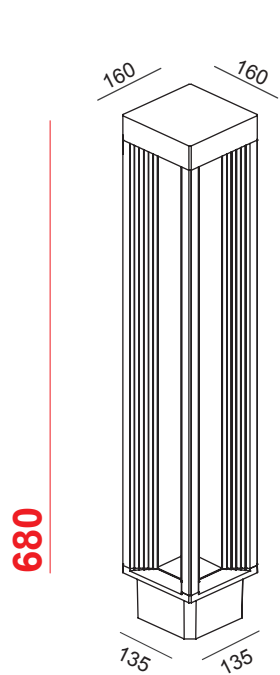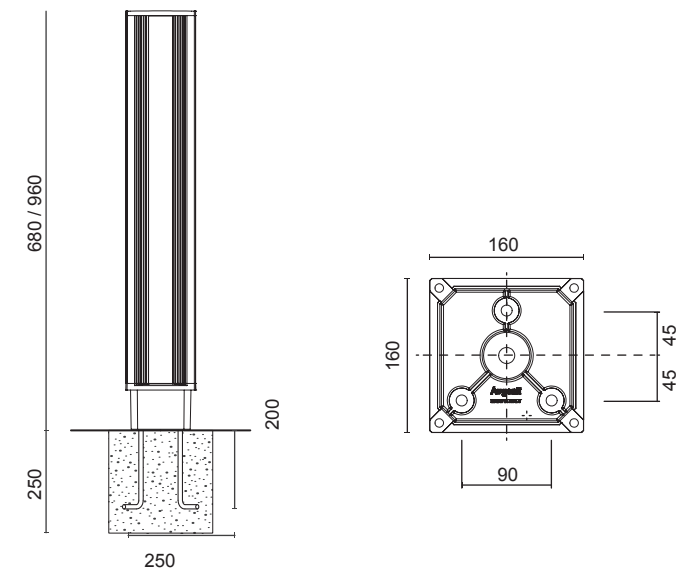



size in millimeters . mm

ORION D

Small Poles H680 mm - led WHITE

LED SYSTEM WITH BUILT-IN DRIVER

code	beam	class	W	source	fixture	CCT LED	CRI
560F1 /WR35VS	360°	I	14W	1880 lm	1120 lm	3000 K	80
560F1 /NR35VS	360°	I	14W	2020 lm	1200 lm	4000 K	80

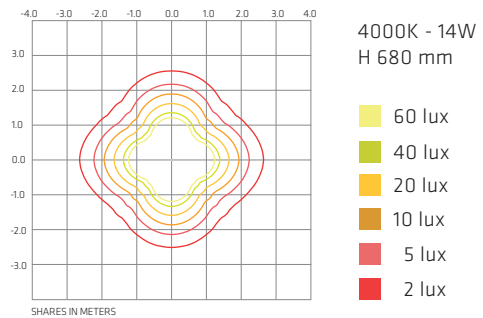


Diffuse Emission 360°
Frosted Glass

Dali dimmable on request
with extra charge



680

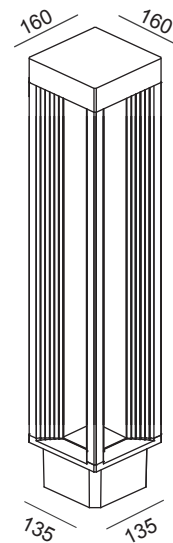

Sizes . H 680 x L 160 x W 160



Assembly / Usage
Ground installation

Ground connection system with
anchoring brackets to be
ordered separately

Specifications





Input Supply 220-240Vac 50/60Hz

ORION D

Small Poles H960 mm - led WHITE

LED SYSTEM WITH BUILT-IN DRIVER

code	beam	class	W	source	fixture	CCT LED	CRI
560F2 /WR35VS	360°	I	14W	1880 lm	1120 lm	3000 K	80
560F2 /NR35VS	360°	I	14W	2020 lm	1200 lm	4000 K	80

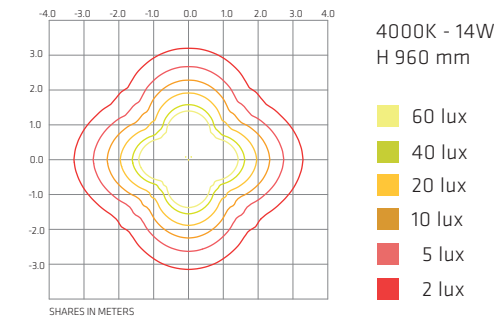


Diffuse Emission 360°
Frosted Glass

Dali dimmable on request
with extra charge



960

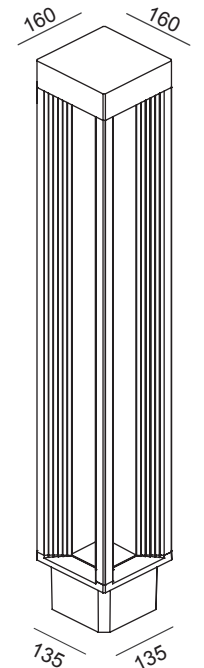

Sizes . H 960 x L 160 x W 160



Assembly / Usage
Ground installation

Ground connection system with
anchoring brackets to be
ordered separately

Specifications



Input Supply 220-240Vac 50/60Hz




Masseria Corsano (LE) Italy

ORION D


Arredo Urbano Urban Lighting Eclairage Urbain



ORION D 570F2

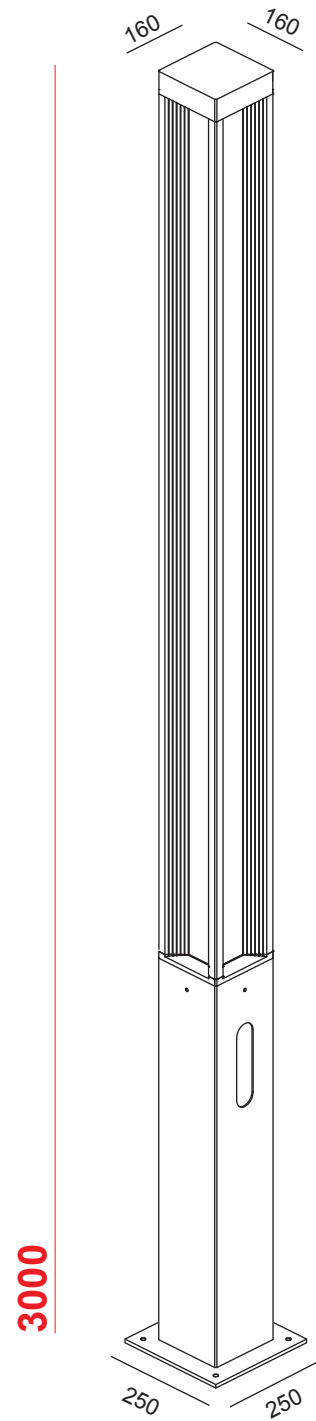

ORION D 570F4

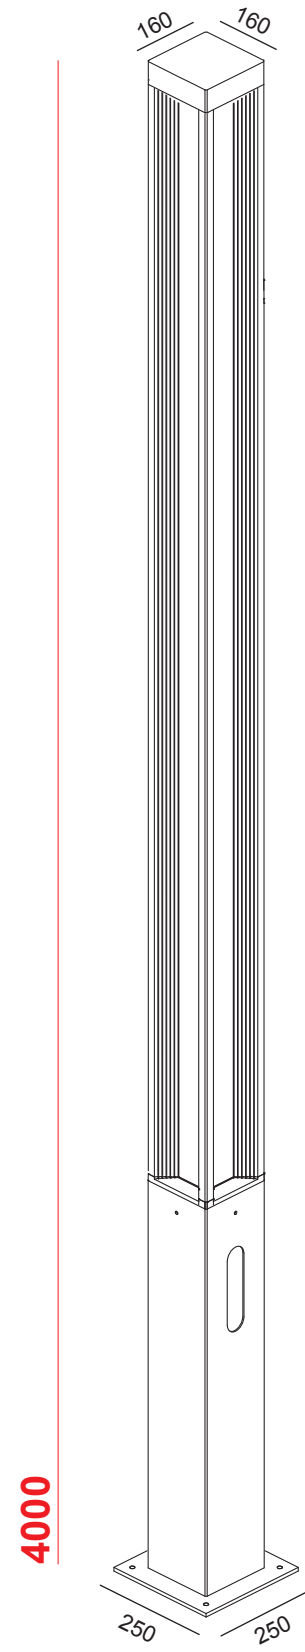

size in millimeters . mm



Fixture Specifications

Protection . IP 65 - IK 08

Body Pole . Extruded aluminium alloy
Body/Base . Die-cast aluminium alloy

Screen . Frosted glass

Seals . Closed-cell EPDM rubber

Screws . Stainless steel A2

Paint / Finishing . Anti-corrosive UV stabilised polyester powder





Finishes


00 PURE WHITE RAL 9016	01 BLACK RAL 9005	10 WHITE RAL 9010	24 BRONZE
25 RUST	30 ANTHRACITE	35 SLATE GREY	40 GREY RAL 9006

Assembly

Ground connection system with anchoring brackets to be ordered separately. The orientation is independent of the layout of the ground fixing holes.

Application

- 
Residential areas
- 
Cycle
Pedestrian paths
- 
Access areas
- 
Parks
Gardens


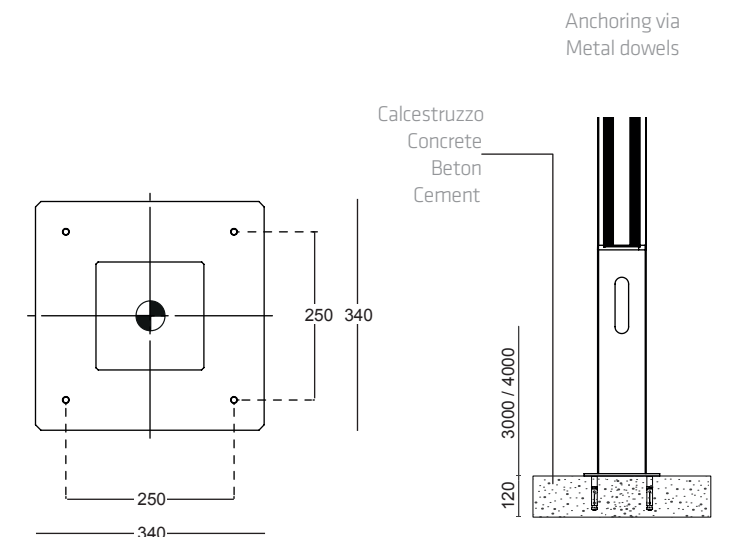


ORION D

Urban Lighting H3000 mm - led WHITE

LED SYSTEM WITH BUILT-IN DRIVER

code	beam	class	W	source	fixture	CCT LED	CRI
570F2 /WC50EW	360°	I	35W	4720 lm	2800 lm	3000 K	80
570F2 /NC50EW	360°	I	35W	5000 lm	2980 lm	4000 K	80

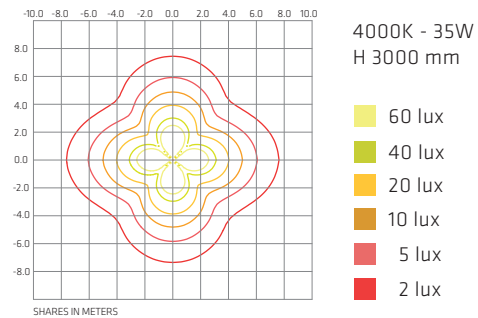

Diffuse Emission 360°
Frosted Glass

Dali dimmable on request
with extra charge

Assembly / Usage
Ground installation

Ground connection system with anchoring brackets to be ordered separately


Specifications



Input Supply 220-240Vac 50/60Hz

Sizes . H 3000 x L 250 x W 250

3000


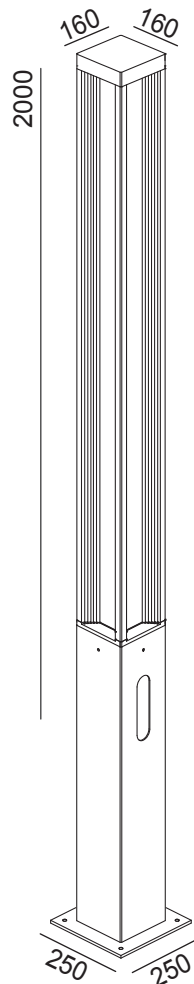


ORION D

Urban Lighting H4000 mm - led WHITE

LED SYSTEM WITH BUILT-IN DRIVER

code	beam	class	W	source	fixture	CCT LED	CRI
570F4 /WC50EW	360°	I	35W	4720 lm	2800 lm	3000 K	80
570F2 /NC50EW	360°	I	35W	5000 lm	2980 lm	4000 K	80

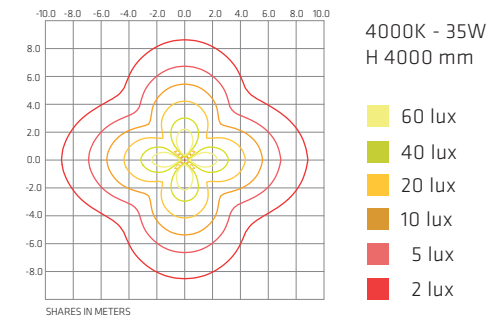

Diffuse Emission 360°
Frosted Glass

Dali dimmable on request
with extra charge

Assembly / Usage
Ground installation

Ground connection system with anchoring brackets to be ordered separately


Specifications



Input Supply 220-240Vac 50/60Hz

Sizes . H 4000 x L 250 x W 250

4000

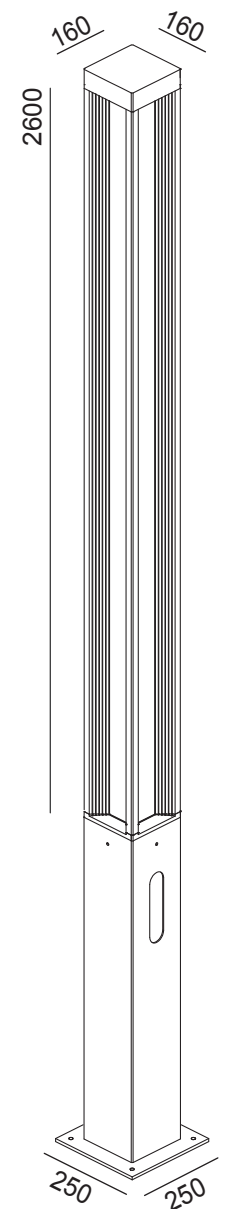



Augenti®

ORION D
Arredo Urbano Urban Lighting Eclairage Urbain



OUR MISSION

in our job, doing beautiful things
and doing them well, basic principle
even before being an entrepreneurial
choice or a market strategy

ORION D

GOOD

INSTALLATION

BY Augenti[®]
LIGHTING DESIGN



Augenti[®]
LIGHTING DESIGN

FRAMON GROUP



AUGENTI LIGHTING S.R.L. UNIPERSONALE

Via Francesco Lana, 31 - 25065 Lumezzane (BS) Italy - tel: (+39) 030 7282524 - fax: (+39) 030 7281879
info@augentilighting.it - www.augentilighting.it